




- Camera head with 1/4-inch CCD and built-in moiré reduction filter delivers clear images with its compact, lightweight and ergonomic design.
- Responding to the needs of outpatient facilities, the system is compatible with various types of endoscopes such as fiberscopes, telescopes and colposcopes.
- Simple, easy-to-use design focused on easier operation. Same width as the CLL-V1 LED light source.
- DVI output compatibility delivers improved connectability with almost all types of monitors, both analog and digital.

OTV-SC2 Office Video System

N5401160 OTV-SC2 video system



Delivery includes:
Video system, CH-SC2-1D camera head, foot holder (4 pcs.),
MB-677 BNC cable, pattern sheet, power cable

Technical Data

Power supply

Voltage..... 220 – 240 V ~
Frequency 50/60 Hz
Power consumption 45 VA

Size

Dimensions, standard width 295 mm
height 69 mm
depth 376 mm
Dimensions, maximum width 312 mm
height 80 mm
depth 401 mm

Weight 4.9 kg

Output

Analog 2x VBS composite, 1x Y/C
Digital 1x DVI

Safety

Type of protection against electric shock..... class I
Degree of protection against electric shock
of applied part TYPE BF
Directive 93/42/EEC class I

Ambient conditions


Operation temperature 10 – 40 °C
relative humidity 30 – 85 %
atmospheric pressure 700 – 1060 hPa
Storage temperature 5 – 40 °C
relative humidity 10 – 95 %
atmospheric pressure 700 – 1060 hPa
Transport..... temperature -20 – 70 °C
relative humidity 10 – 95 %
atmospheric pressure 700 – 1060 hPa

Accessories


N5400860 CH-SC2-1D camera head




027913 BNC cable MB-677,
1.5 m



N3647500 DVI cable MAJ-1945




E0482003 S-video cable MH-985



For a system chart, see sheet EQ-082.


For video adapters, see sheet EQ-082.

System Chart

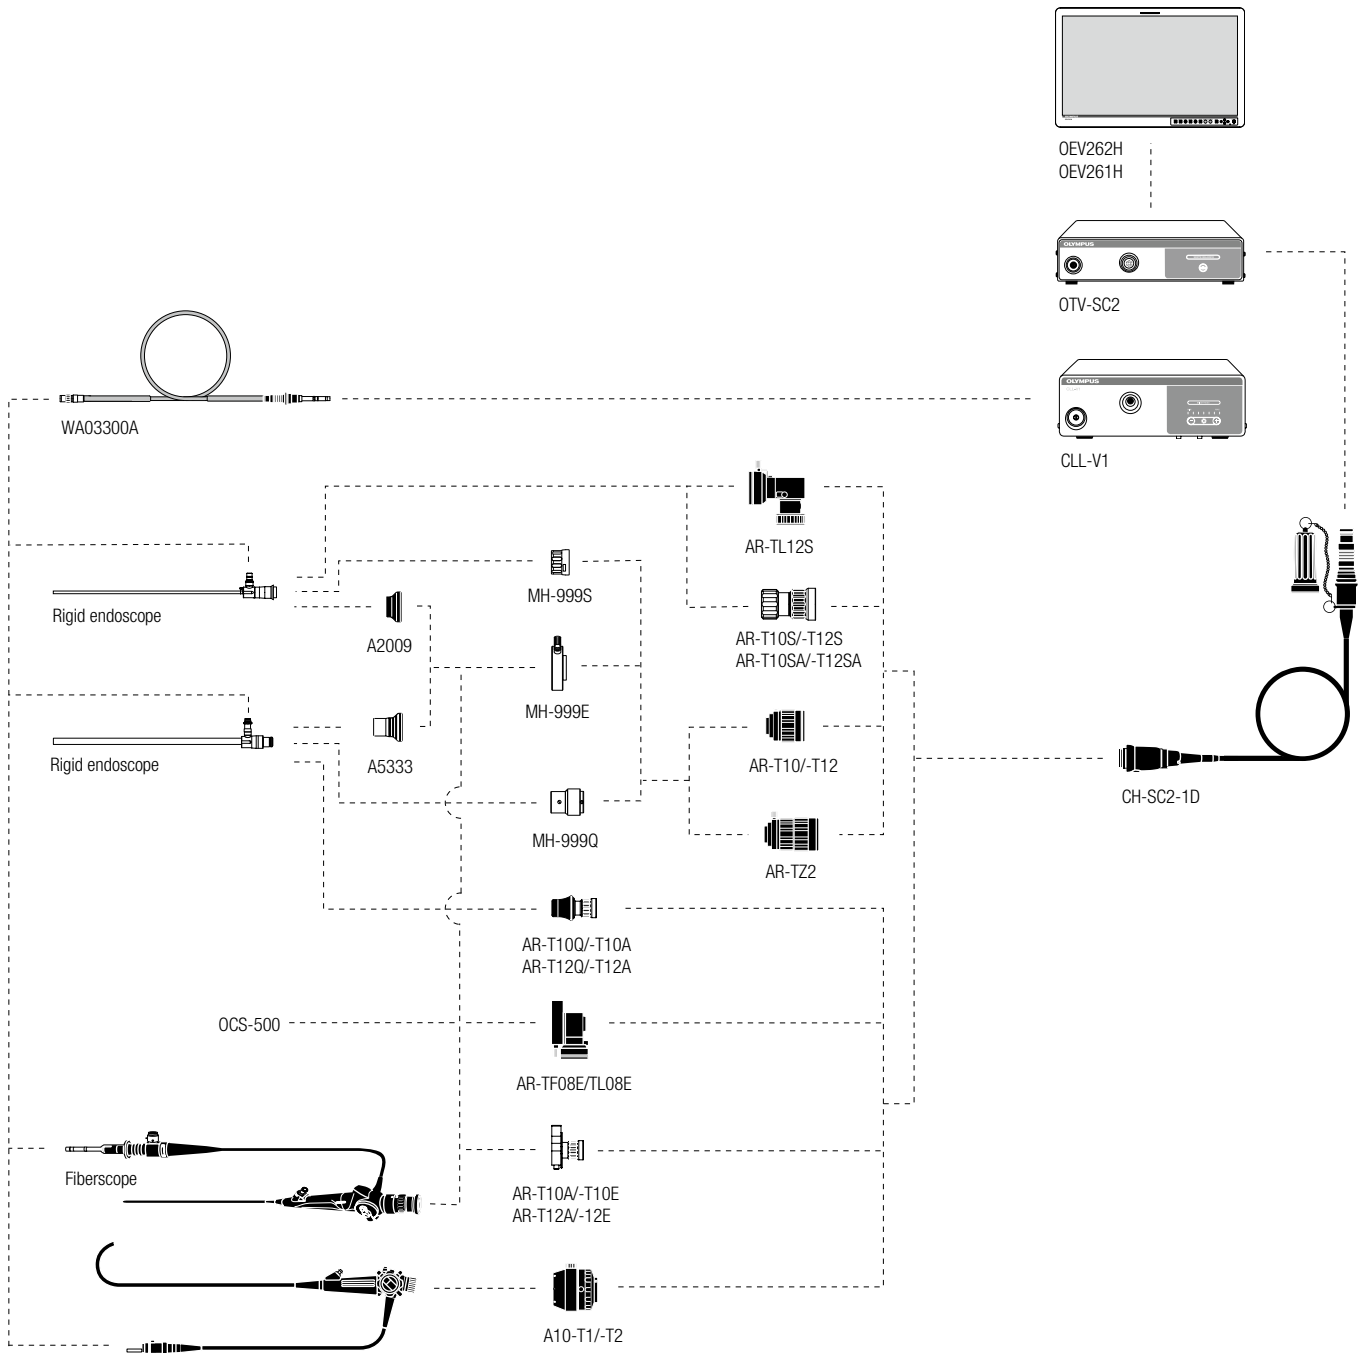


Autoclavable Video Adapters


A4210A Video adapter, eyepiece type, autoclavable, "AR-T10EA", 1.0x
 A4211A "AR-T12EA", 1.2x



A4212A Video adapter, screw type, autoclavable, "AR-T10SA", 1.0x




A4214A Video adapter, quick-lock type, autoclavable, "AR-T10QA", 1.0x
 A4215A "AR-T12QA", 1.2x




Video Adapter


A8960 Video adapter, eyepiece type, "AR-T10E", 1.0x
 A8963 "AR-T12E", 1.2x



A8961 Video adapter, screw type, "AR-T10S", 1.0x
 A8964 "AR-T12S", 1.2x



A8962 Video adapter, quick-lock type, "AR-T10Q", 1.0x
 A8965 "AR-T12Q", 1.2x




A4923 Video adapter, L-shape, eyepiece type, "AR-TF08E", 0.8x, with viewfinder
 A4924 "AR-TL08E", 0.8x




Video Adapter for OES Fiberscopes

A4929 Video adapter, for OES fiberscopes (gastrosopes etc.), "A10-T1", 1.0x
 A4930 "A10-T2", 2.0x




Video Couplers

A4925 Video coupler "MH-999Q", quick-lock type



A4926 Video coupler "MH-999E", eyepiece type



A4927 Video coupler "MH-999S", screw type



Video Adapters for Couplers

For use with video couplers MH-999Q/E/S.

A4921 Video adapter, "AR-T10", 1.0x
 A4920 "AR-T12", 1.2x



A4922 Video adapter "AR-TZ2", zoom type, 1.0–2.0x



A4928 Video adapter "AR-TL12S", L-shape

